


This fuze was used in the 3inch HE mortar bombs.

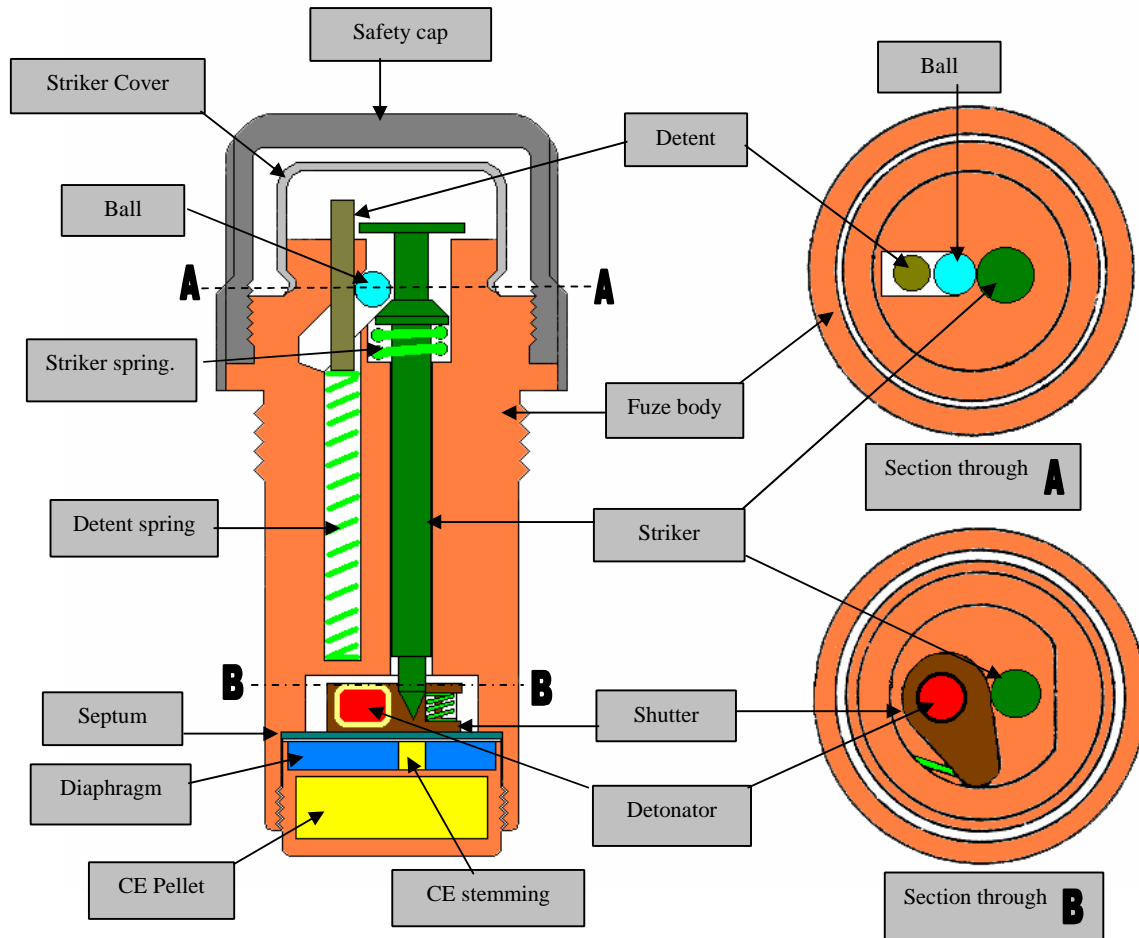

**ACTION.**  
 Safety cap is removed prior to firing. On firing the detent sets back allowing the ball to roll down the channel. This action permits the striker spring to drive the striker upwards. This action frees the shutter to move into the armed position, which brings the detonator into line with the striker and the CE stemming. On impact the striker is driven into the detonator commencing the detonation of the projectile.